
MANUAL

Thanks for buying our product. Please read this manual carefully before installation and use as the manual said. In order to refer more information please take care of the manual.



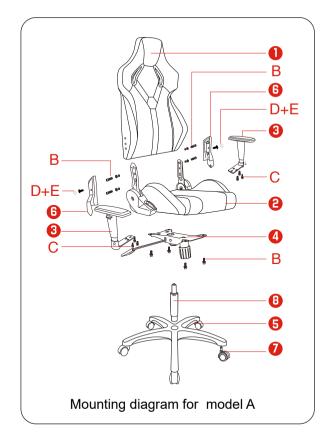

% NOTES **%**

TOPSKY-079 GAMING CHAIR MANUAL

Any issues, please contact our service team with Order-ID. And if that is possible pictures or

detail of issue will be helpful for a fast way solution.


Email: service@topskyfurniture.com Phone number: +1 725-333-1988 Home Page: https://www.topskyfurniture.com/


All office chairs purchased on TOPSKY are backed by 1-year warranty. Specifically, the warranty covers:


- ①Gas cylinder falling automatically
- (May need to remove gas lift from mechanism)
- 2) Chair base, mechanism, arms, castors, back, frame, headrest damaged
- 3 Mechanism losing control
- (e.g. the back can't be fixed in position, if the chair has recline function) (4) Sponge foam on seat/armrest/lumbar support (if have) being collapsed by more than 50% (e.g. 2.76 inch to 1.38 inch)
- ⑤Leather/Mesh damaged or falling apart over 1.18inch in diameter
- ⑥Squeaky noise (May need to remove gas lift from mechanism)

*For some issues over 1 year, we can provide paid replacement parts service. Please contact us by phone, email or official website.































Screw Covers 2pcs







STEP 1

Lock the armrest to the seat base

Put the armrest on the seat base and tighten 8pcs bolts **[C]** (M8*30)







STEP 2

Put the back rest and seat together

Put the back rest and seat together as the picture 1. Please pay attention to the red marked place (left and right sides) which need aim at the bolts holes.



Lock the back rest and seat

Lock 4pcs bolts **[B]** (M8*25) on the left and right side as the picture step by step.

(Begin at the right side where the tilting handle is located. Screw both bolts on the right side half way in and then screw in the two bolts on the left side. Now tighten the bolts on both sides)








STEP 4

Install the recliner covers

Attach the lower snap button first. Lock the Screw D(M5*16) into the hole on the recliner cover.

*Pay attention Left and right Recliner Covers are different.



STEP 5 Install the mechanism

Use 4pcs bolts **[**B**]** (M8*25) to lock the Mechanism and seat together, and make sure the bolts are screwed in tight.


*Pay attention direction of the mechanism








STEP 6 Install the wheel





STEP 7 Install the gas spring





STEP 8 Put the chair body on the gas spring

Aim at the top of gas spring and the hole of mechanism, then put the chair body down.











Sit in the center of the chair, Do not sit at the front edge of Do not stand on the chair. Do not use the chair with more with your back to the backrest.



Do not push the chair aroundwhen a person is sitting in it.



Do not push down on thebackrest when a person is reclined.



Do not place all your weight on the backrest only.



orfingers near the recline mechanics.